


| | | | | | | |
|---|------|----------------------------|-------------|-------------|------------|-------------|
| A | 主要参数 | Magnification | 0.37X | 0.50X | 0.63X | 0.65X |
| | | Working Distance (mm) | 416.04±5 | 335.34±5 | 286.29±5 | 278.9±5 |
| | | Image Distance (mm) | 139.866±2.5 | 154.905±2.5 | 170.22±2.5 | 173.238±2.5 |
| | | Conjugate Distance (mm) | 608.55±9 | 542.89±9 | 509.15±9 | 504.79±9 |
| | | Flange Focal Distance (mm) | 153.51±0.5 | 168.55±0.5 | 183.86±0.5 | 186.88±0.5 |
| | | EFL | 120 | | | |
| | | Max image | φ86 | | | |
| | | F/# | 5.6 | | | |
| | | Distortion | 0.09% | 0.06% | 0.04% | 0.03% |
| | | Illumination | 0.62 | | | |

| | | | |
|---|---------------|-----|-----|
| B | IMAGE QUALITY | | |
| | AXIS | φ40 | φ86 |
| | 100 | 80 | 60 |

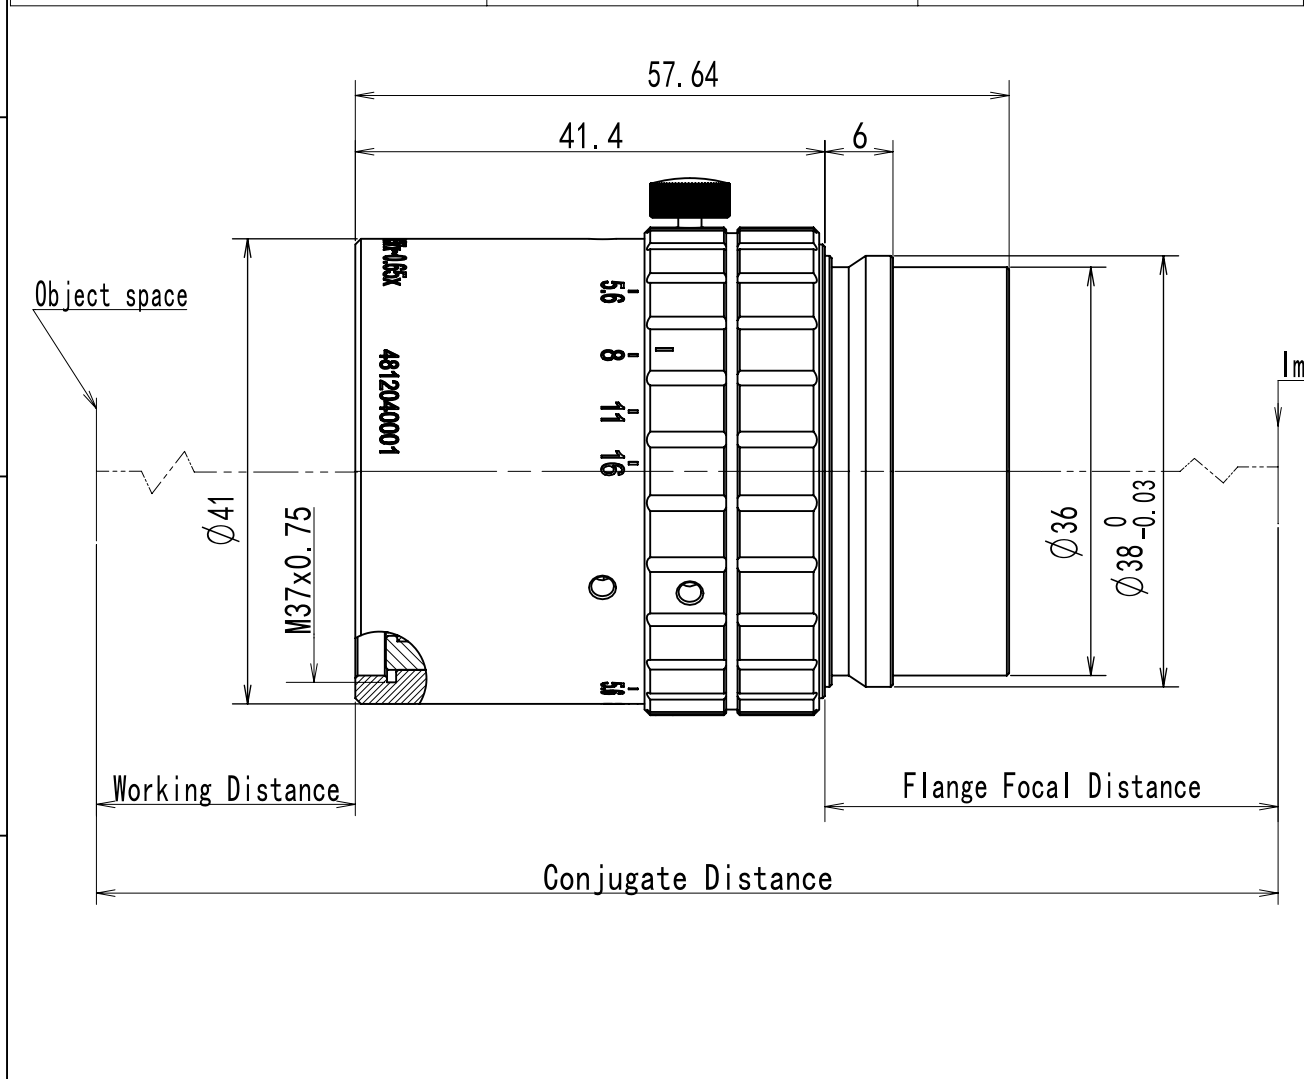

| | | | | | | | | | | | |
|--|--|--|--|----|-------|----|----|----------------|--|--|--|
| | | | | 材料 | | | | | | | |
| | | | | | | | | | | | |
| | | | | 单位 | 比例 | 数量 | 页码 | 名称 | | | |
| | | | | mm | 1.5:1 | 1 | 1 | LS12056A_外形规格图 | | | |
| | | | | | | | | 图号 | | | |
| | | | | | | | | | | | |

| | |
|--------|-----------|
| 描图 | |
| 旧底图登记号 | |
| 底图登记号 | |
| 设计 | YZQ |
| 校对 | |
| 审核 | |
| 批准 | |
| 日期 | '21.04.05 |