


A	Magnification	0.18X	0.21X	0.24X
	Working Distance(mm)	489.10±5	430.86±5	387.83±5
	Image Distance(mm)	64.06±2.5	66.2±2.5	68.3±2.5
	Conjugate Distance(mm)	599.7±9	543.62±9	502.66±9
	Flange Focal Distance(mm)	83.26±0.5	85.4±0.5	87.5±0.5
	EFL	80		
	Max image	φ64		
	F/#	5.6		
	Distortion	<0.1%	<0.05%	<0.1%
	Illumination	75%		

IMAGE QUALITY			
AXIS	φ45	φ64	
125lp/mm	80lp/mm	80lp/mm	



线性尺寸未注公差	>0.5-6	±0.05	角度尺寸未注偏差	>0-10	±1°	材料	
	>6-30	±0.1		>10-50	±30'		
	>30-120	±0.15		>50-120	±20'		
	>120-400	±0.2		>120-400	±10'		
设计	审核	批准					
彭苏凡							
'20.04.16							
△	1	D3	彭苏凡	'20.04.20	图样标记		
标记	处数	位置分区	变更号	签字	日期		

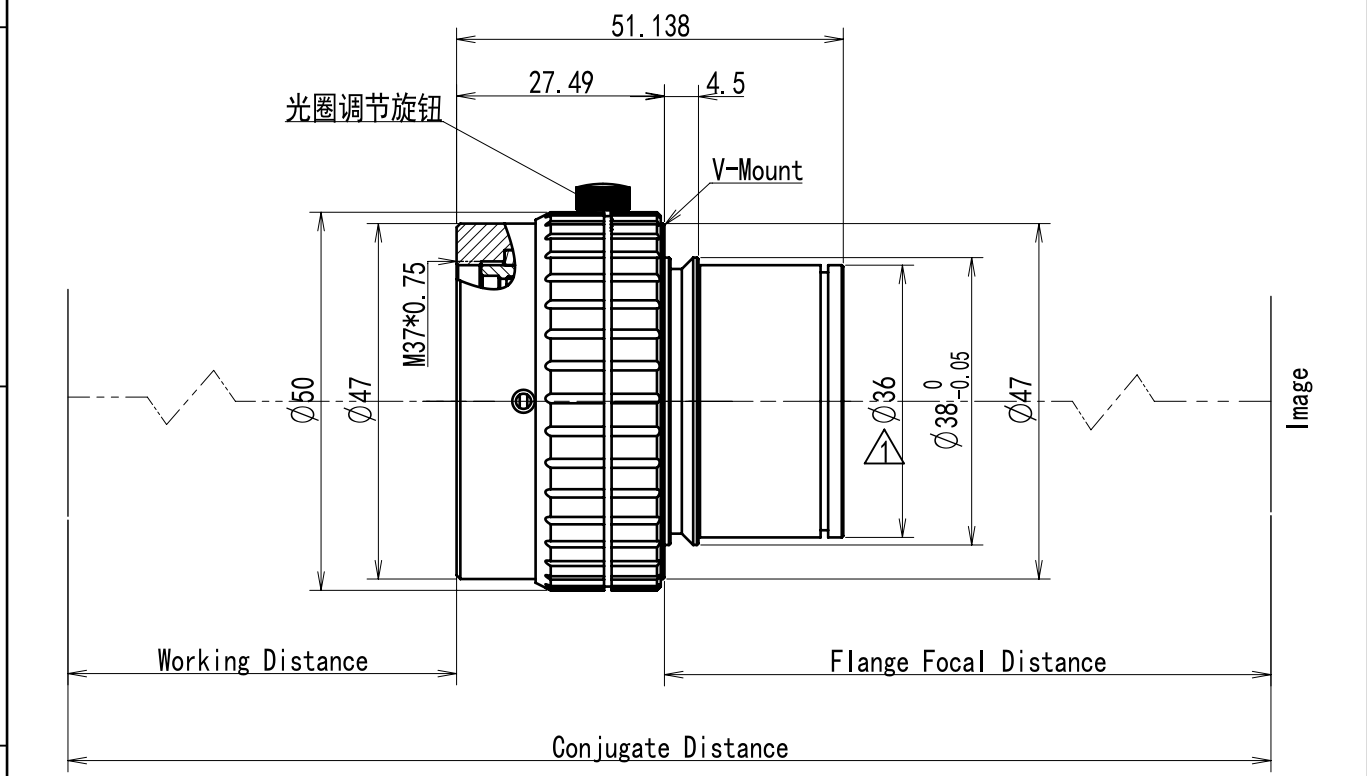

名称  
LS80021APO\_外形规格图

图号

单位	比例	数量	页码
mm	1:1	1	1/1



描图

旧底图登记号

底图登记号

标记

A

B

C

D

E

F

A4