


	1	2	3	4
Magnification		0.2X	0.3X	0.4X
Working Distance(mm)		455±5	322±5	255.46±5
Image Distance(mm)		79.13±2.5	87.07±2.5	95.01±2.5
Conjugate Distance(mm)		575.86±9	450.76±9	392.18±9
Flange Focal Distance(mm)		93.56±0.5	101.5±0.5	109.44±0.5
EFL		80		
Max image		φ 64		
F/#		5.6		
Distortion		<0.03%	<0.01%	<0.03%
Illumination		75%		
IMAGE QUALITY				
AXIS		φ 45	φ 64	
100lp/mm		63lp/mm	63lp/mm	

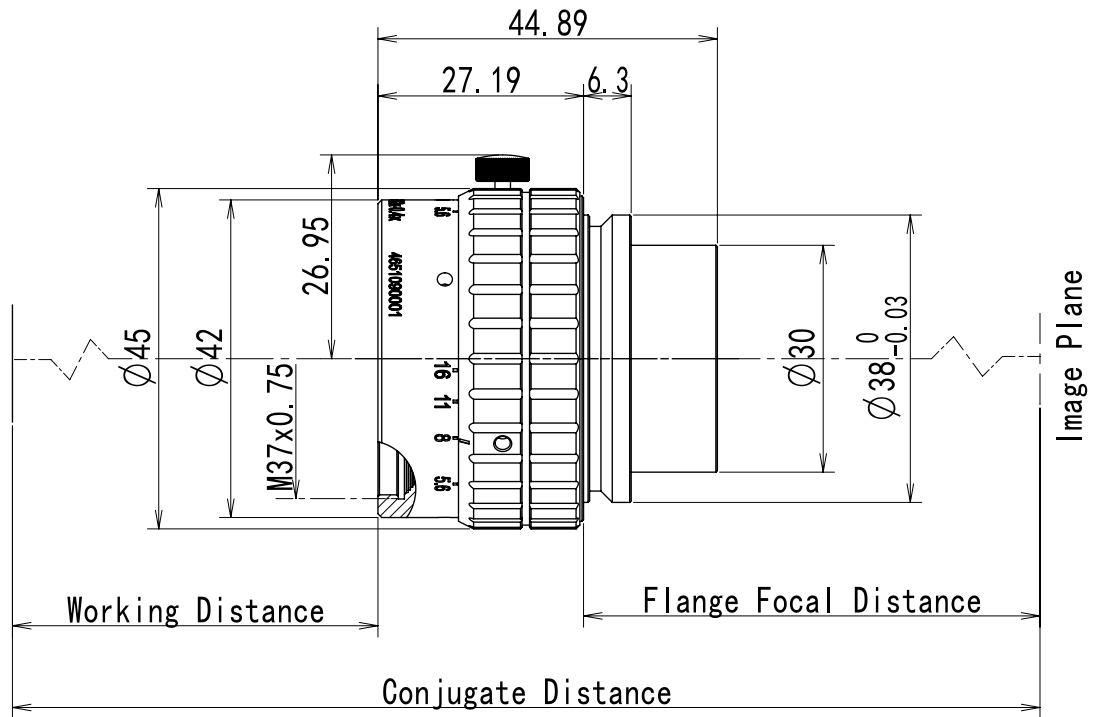

线性尺寸未注公差	>0.5-6	±0.05	线性尺寸未注公差	>0-10	±1°	材料		
	>6-30	±0.1		>10-50	±30'			
	>30-120	±0.15		>50-120	±20'			
	>120-400	±0.2		>120-400	±10'			
名称						LS8056A_外形规格图		
图号						图号		
设计						审核		
杨志全								
'20.03.06								
图样标记						单位		
						比例		
						数量		
						页码		
mm						1:1		
1						1		
1/1						1/1		